

Specification

FOR

Self-Supporting

Armored Optic Cable

[GYXTC8Y]

1. CABLE CONSTRUCTION

1.1. CROSS SECTIONAL DIAGRAM



1.2. TECHNICAL SPECIFICATION

Fiber count		8	12	16	24	48
Loose Tube	OD(mm):	2.5±0.1			2.8±0.1	3.8±0.1
	Material:	PBT				
Max fiber count/tube		8	12	16	24	48
Core structure		Central tube				
Sling		Galvanized steel wire	braided steel strands 7*0.7mm			
		PE sheath	Non. 0.8mm			
Web	Height	1.0mm				
	Width	1.0mm				
Sheath	Thickness:	Non. 1.5mm				
	Material:	MDPE				
OD of cable (mm)		5.5*10.2			5.8*10.5	6.8*11.5
Net weight (kg/km)		54			57	67

2. FIBER AND LOOSE BUFFER TUBE IDENTIFICATION

NO.	1											
Tube Color	natural											
NO.	1	2	3	4	5	6	7	8	9	10	11	12
Fiber Color	Blue	Orange	Green	Brown	Slate	natural	Red	Black	Yellow	Violet	Pink	Aqua

3.OPTICAL FIBER

3.1 Single Mode Fiber

LTEMS	UNITS	SPECIFICATION	
		G652D	G657A
Fiber type		G652D	G657A
Attenuation	dB/km	1310nm ≤ 0.36 1550nm ≤ 0.22	
Chromatic Dispersion	ps/nm.km	1310nm ≤ 3.5 1550nm ≤ 18 1625nm ≤ 22	
Zero Dispersion Slope	ps/nm ² .km	≤ 0.092	
Zero Dispersion Wavelength	nm	1300 ~ 1324	
Cut-off Wavelength (λ _{cc})	nm	≤ 1260	
Attenuation vs. Bending (60mm x100turns)	dB	(30mm radius, 100ring) ≤ 0.1 @ 1625nm	(10mm radius, 1ring) ≤ 1.5 @ 1625nm
Mode Field Diameter	μm	9.2 ± 0.4 at 1310nm	9.2 ± 0.4 at 1310nm
Core-Clad Concentricity	μm	≤ 0.5	≤ 0.5
Cladding Diameter	μm	125±1	125±1
Cladding Non-circularity	%	≤ 0.8	≤ 0.8
Coating Diameter	μm	245±5	245±5
Proof Test	Gpa	≥ 0.69	≥ 0.69

4. Mechanical and Environmental Performance of the Cable

NO.	ITEMS	TEST METHOD	ACCEPTANCE CRITERIA
1	Tensile Loading Test	#Test method:IEC 60794-1-E1 -. Short-tensile load: 4000N -. Cable length: ≥50m	-. No jacket cracking and fiber breakage
2	Crush Resistance Test	#Test method:IEC 60794-1-E3 -.Long load: 300 N/100mm -.Short load: 1000 N/100mm Load time: 1 minutes	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
3	Impact Resistance Test	#Test method:IEC 60794-1-E4 -.Impact height: 1 m -.Impact weigh: 500 g	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber

		-.Impact point: ≥ 5 -.Impact frequency: $\geq 3/\text{point}$	breakage
4	Repeated Bending	#Test method:IEC 60794-1-E6 -.Mandrel diameter: 20D (D = cable diameter) -.Subject weight: 10kg -.Bending frequency: 30 times -.Bending speed: 2s/time	-. Attenuation increment@1550nm: $\leq 0.1\text{dB}$ -. No jacket cracking and fiber breakage
5	Torsion Test	#Test method:IEC 60794-1-E7 -.Length: 1m -.Subject weight:10kg -.Angle: ± 180 degree -.Frequency: $\geq 10/\text{point}$	-. Attenuation increment@1550nm: $\leq 0.1\text{dB}$ -. No jacket cracking and fiber breakage
6	Water Penetration Test	#Test method:IEC 60794-1-F5B -.Height of pressure head: 1m -.Length of specimen: 3m -.Test time: 24 hours	-. No leakage through the open cable end
7	Temperature Cycling Test	#Test method:IEC 60794-1-F1 -.Temperature steps: $+20^{\circ}\text{C}$ 、 -40°C 、 $+60^{\circ}\text{C}$ 、 $+20^{\circ}\text{C}$ -.Testing Time: 24 hours/step -.Cycle index: 2	-. Attenuation increment@1550nm: $\leq 0.1\text{dB}$ -. No jacket cracking and fiber breakage
8	Drop Performance	#Test method:IEC 60794-1-E14 -.Testing length: 30cm -.Temperature range: $70\pm 2^{\circ}\text{C}$ -.Testing Time: 24 hours	-. No filling compound drop out
9	Temperature	Operating: $-40^{\circ}\text{C}\sim +60^{\circ}\text{C}$ Store/Transport : $-50^{\circ}\text{C}\sim +65^{\circ}\text{C}$ Installation $-20^{\circ}\text{C}\sim +60^{\circ}\text{C}$	

5. FIBER OPTIC CABLE BENDING RADIUS

Static bending: ≥ 10 times than cable out diameter


Dynamic bending: ≥ 20 times than cable out diameter.

6. PACKAGE AND MARK

6.1 PACKAGE

Not allowed two length units of cable in one drum, two ends should be sealed,. Two ends

should be packed inside drum, reserve length of cable not less than 3 meters.

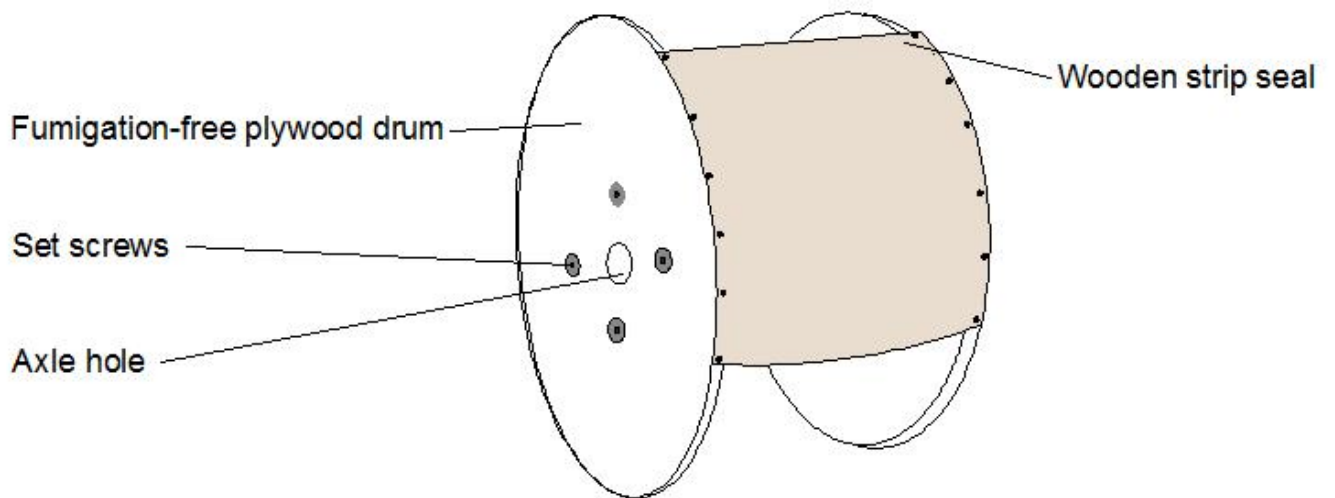

6.2 MARK

Cable Mark: Brand、Cable type、Fiber type and counts、Year of manufacture、Length marking 。

7. TEST REPORT

Test report and certification supplied.